

Fiber-Components

- How to work with fiber modulators:

- english:

Modulatorfiber_english

- german:

Modulatorfiber_german

Fiber EOM

Company: [Jenoptik](#)

- Typ: PM1550

- Center wavelength: 1550 nm
- Insertion loss: 3.0 dB
- Electronic connector: SMA, Inputimpedanz: 50 Ohm
- $U_{pi@1kHz}$: 8.5 V
- Fiber-typ: PM
- Fiber-connector: FC/APC
- Fiber length: 1m
- Crystall: Lithiumniobat (
)
- Max optical input power: 300mW cw

Info_crystall

- Datasheet:

- german:

Datasheet Fiber-Eom_german

- english:

Datasheet Fiber-Eom_english



Do not apply voltages higher than 40V peak-peak to RF input.


Fiber Coupler

50/50

Company: [Opneti](#)

- Typ: CS-PS-A-2×2-1550-50/50-900-5-0.25-FA-3×54

- Type: PS=PM Fused Coupler
- Grade: A=Grade
- Port Type: 2×2
- Wavelength: 1550
- Coupling Ratio: 50/50
- Pigtail Type: 900=900um Loose Tube
- Fiber Type: 5=Panda Fiber
- Length: 0.25m
- Connector: FA=FC/APC
- Package: $\phi 3.0 \times 54$
- Datasheet: Datasheet Fiber-coupler_50/50_Opneti
- Test report:

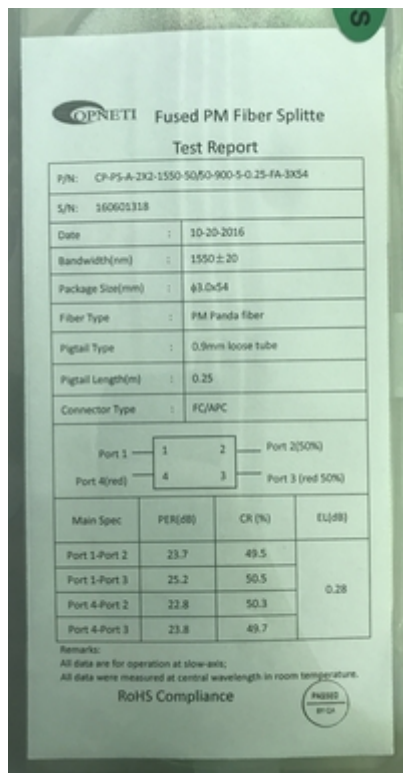

From: <https://iqwiki.iqo.uni-hannover.de/> - IQwiki

Permanent link: https://iqwiki.iqo.uni-hannover.de/doku.php?id=groups:mg:project_ptb-cavity:fiber-components&rev=1495011179

Last update: 2017/05/17 08:52

