

Fiber-Components

- How to work with fiber modulators:

- english:

Modulatorfiber_english

- german:

Modulatorfiber_german

Fiber AOM

Company: [AMS Technologies AG](#), [Gooch & Housego Torquay](#)

- Typ: SFO4504-T-M080-0.5C8J-3-F2P
- Fiber-coupled acousto-optic modulator, model Fibre-Q
<http://www.amstechnologies.com/products/optical-technologies/components/optics/acousto-optics/view/fibre-coupled-acousto-optic-modulators/>
 - Material: Amtir
 - Wavelength: 1550 nm
 - Operation frequency: +80 MHz
 - Polarisation maintaining fiber
 - Fibre length: 0.3M
 - Gibre-connector: FC/APC

Fiber EOM

Company: [Jenoptik](#)



Do not apply voltages higher than 40V peak-peak to RF input.

- Typ: PM1550
 - Center wavelength: 1550 nm
 - Insertion loss: 3.0 dB
 - Electronic connector: SMA, Inputimpedanz: 50 Ohm
 - $U_{pi@1kHz}$: 8.5 V
 - Fiber-typ: PM
 - Fiber-connector: FC/APC
 - Fiber length: 1m
 - Crystall: Lithiumniobat (

Info_crystall

)

- Max optical input power: 300mW cw
- Datasheet:
 - german: Datasheet Fiber-Eom_german
 - english: Datasheet Fiber-Eom_english
 - supplied:



Fiber Coupler

50/50

Company: [Opneti](#)


- Typ: CS-PS-A-2x2-1550-50/50-900-5-0.25-FA-3x54
 - Type: PS=PM Fused Coupler
 - Grade: A=Grade
 - Port Type: 2x2
 - Wavelength: 1550
 - Coupling Ratio: 50/50
 - Pigtail Type: 900=900um Loose Tube
 - Fiber Type: 5=Panda Fiber

- Length: 0.25m
- Connector: FA=FC/APC
- Package: $\varnothing 3.0 \times 54$

- Datasheet:

Datasheet Fiber-coupler_50/50_Opneti

- Test report:

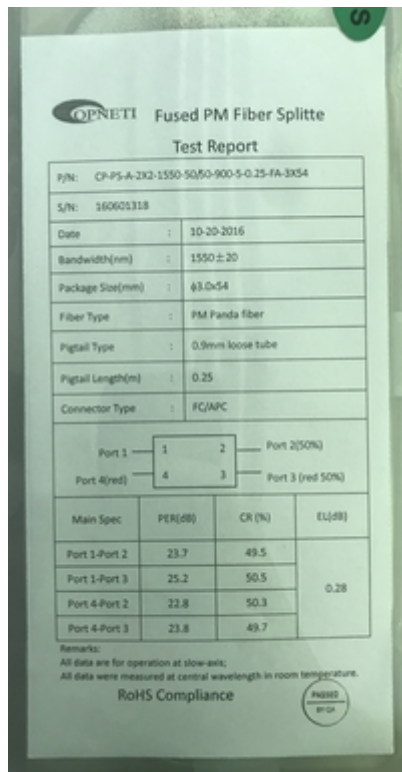

From:
<https://iqwiki.iqo.uni-hannover.de/> - IQwiki

Permanent link:
https://iqwiki.iqo.uni-hannover.de/doku.php?id=groups:mg:project_ptb-cavity:fiber-components&rev=1495014029

Last update: 2017/05/17 09:40

