

Optical Contacting

- Durchgeführt von T. Legero an der PTB.
- Dokumentation:

labjournal_thomas_legero

Calculation between cavity spectrum and frequency distance

Calculates the cavity spectrum and the frequency distance between TEM₀₀ and higher order modes m+n. Two curved mirrors possible. Programm made by T. Legero.

Parameter

- Radius of curvature of mirror R1: R1= 1 m
- Radius of curvature of mirror R2: R2= 1 m
- Cavity Length: L= 0.48 m
- Reflectivity of mirrors: R= 0.99998
- Speed of light: c= 299792458 m/s

Step 1: Calculate the Free-Spectral-Rang and Gouy-Phase

- Free-Spectral-Rang: FSR
- Gouy-Phase: Gouy

$$FSR = \frac{c}{2 \cdot L} \quad Gouy = \frac{FSR}{\pi} \cdot \arccos \left(\sqrt{\left(1 - \frac{L}{R1}\right) \cdot \left(1 - \frac{L}{R2}\right)} \right)$$

⇒

- FSR = 312.284 MHz
- Gouy = 101.783 MHz

Step 2: Calculate the frequency difference between TEM₀₀ and TEM_{mn}

- TEM mode number: mn
- Next TEM₀₀: w
- Frequency difference between TEM₀₀ and TEM_{mn}: Delta

$$\Delta = FSR - mn \cdot Gouy$$

- Define maximum of mn and w:
 - mn_{max} = 100

- $w_{\max} = 100$
- Define maximum of shown frequency difference to TEM₀₀:
 - $\text{abs}(\Delta(mn, w)) < 10E6$
- Frequency difference von (q-w)ter höherer Mode mn zu q-ter TEM₀₀-Mode (Matrix):

$$\Delta(mn, w) = w \cdot \text{FSR} - mn \cdot \text{Gouy}$$

⇒


Freq. diff. of $m+n = 3$ higher order mode to 00-mode is 6.93401 MHz
 Freq. diff. of $m+n = 43$ higher order mode to 00-mode is -4.70713 MHz
 Freq. diff. of $m+n = 46$ higher order mode to 00-mode is 2.22688 MHz
 Freq. diff. of $m+n = 49$ higher order mode to 00-mode is 9.16089 MHz
 Freq. diff. of $m+n = 86$ higher order mode to 00-mode is -9.41427 MHz
 Freq. diff. of $m+n = 89$ higher order mode to 00-mode is -2.48026 MHz
 Freq. diff. of $m+n = 92$ higher order mode to 00-mode is 4.45375 MHz

Step 3: Calculate the frequency difference between TEM₀₀ and the nearest TEM_{nm}

- Define the Modenummer of Higher-Order-Mode to plot (next Mode to 00):
 - $mn = 3$
- Define the Vary Mirror-Curvature:
 - $R = 0.95:0.01:1.05$
- Frequency difference between TEM₀₀ and TEM_{mn}:

$$\Delta = \text{FSR} - mn \cdot \text{Gouy}$$


- `plot(R, Delta)` **[Important!]**:

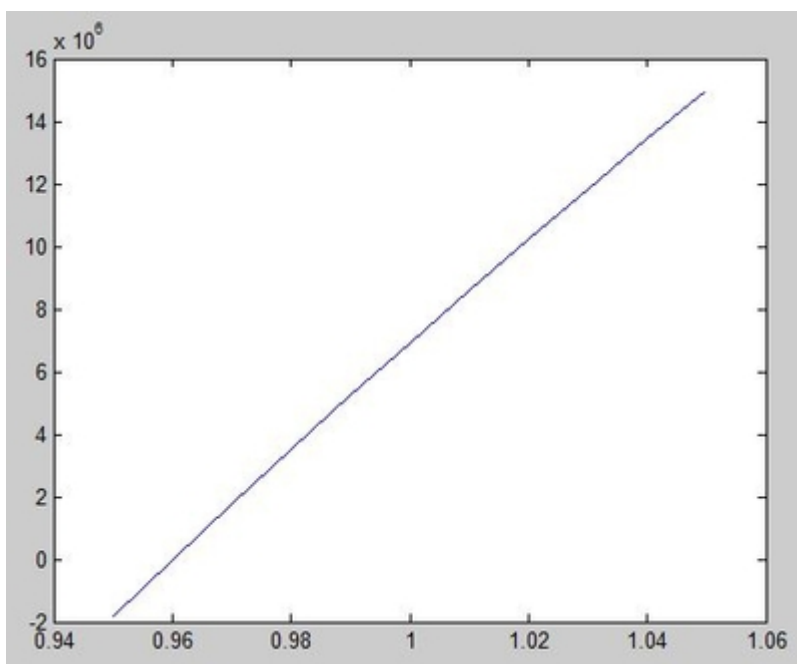




Achtung: ROC wird hoffentlich $>1\text{m}$ werden, damit die $m+n = 3$ Mode weiter weg ist!

- `plot(Gouy,Delta):`

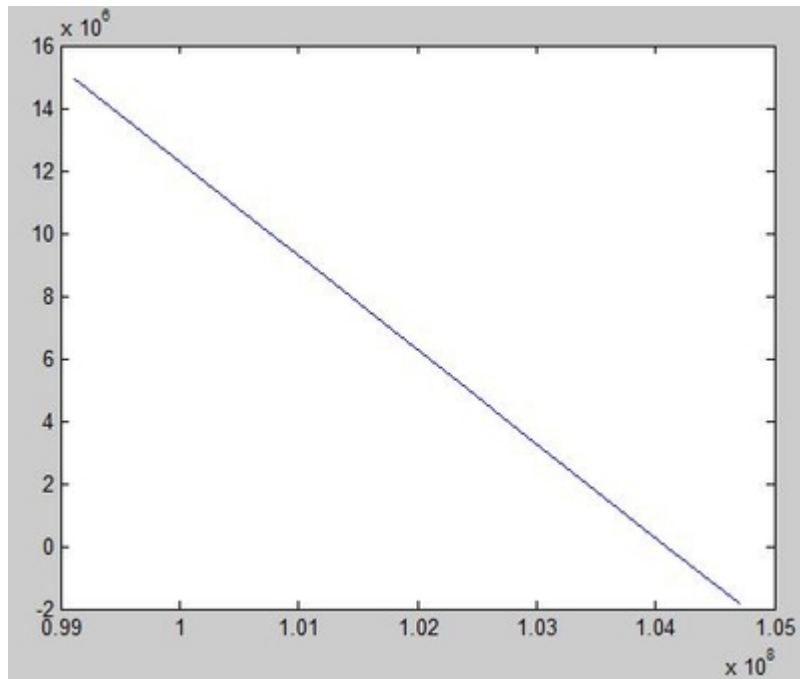


- `plot(R,Gouy):`

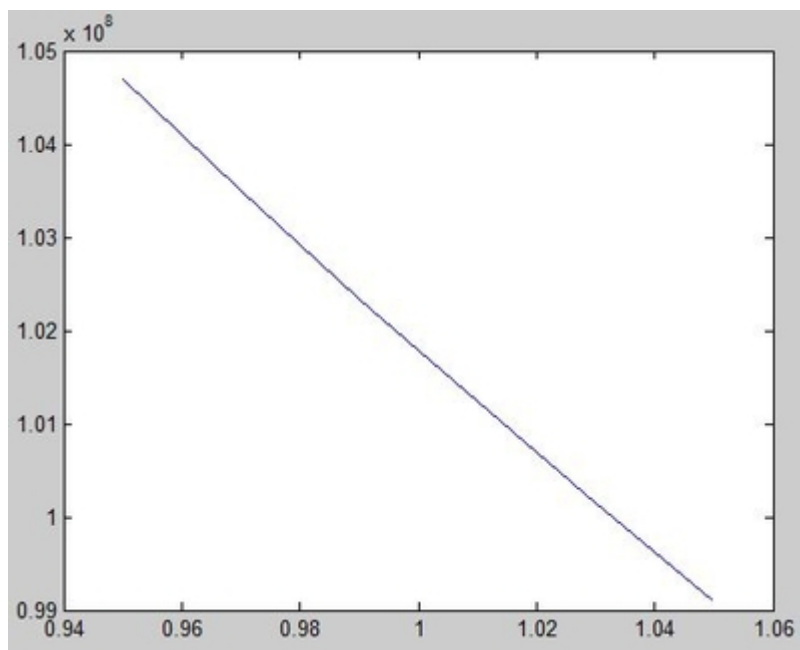



Photos

Spacerreinigung

Durchgeföhrt am 10.07.2017

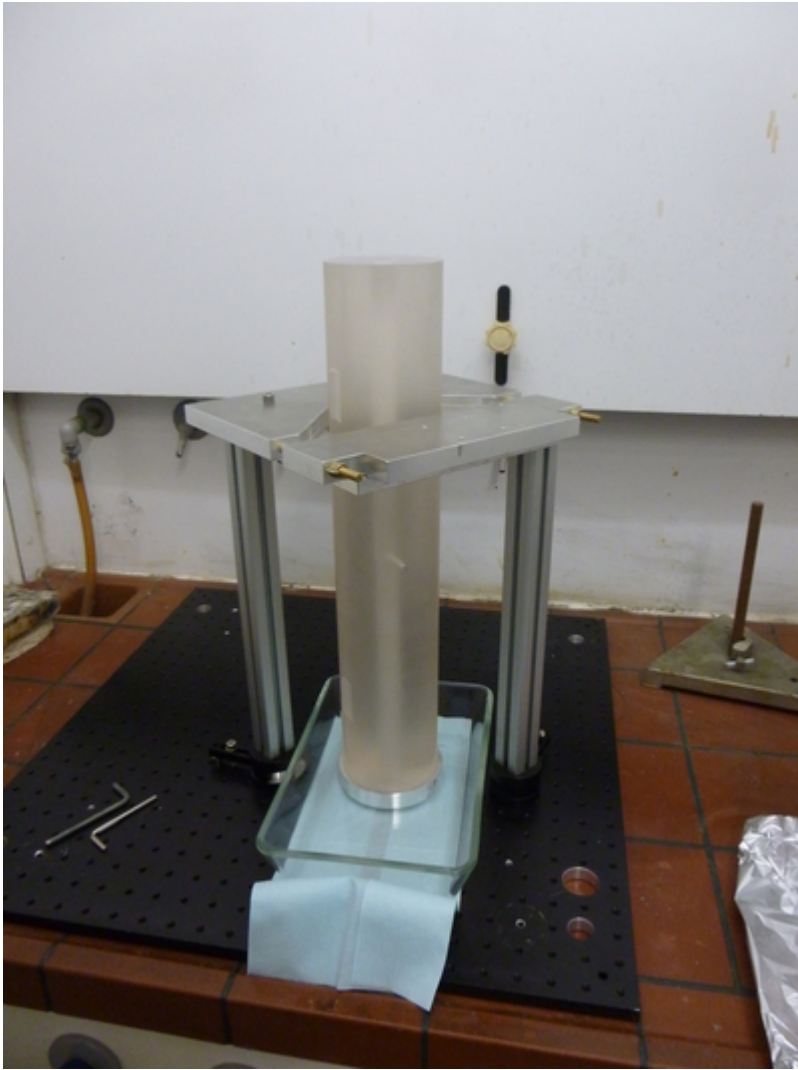


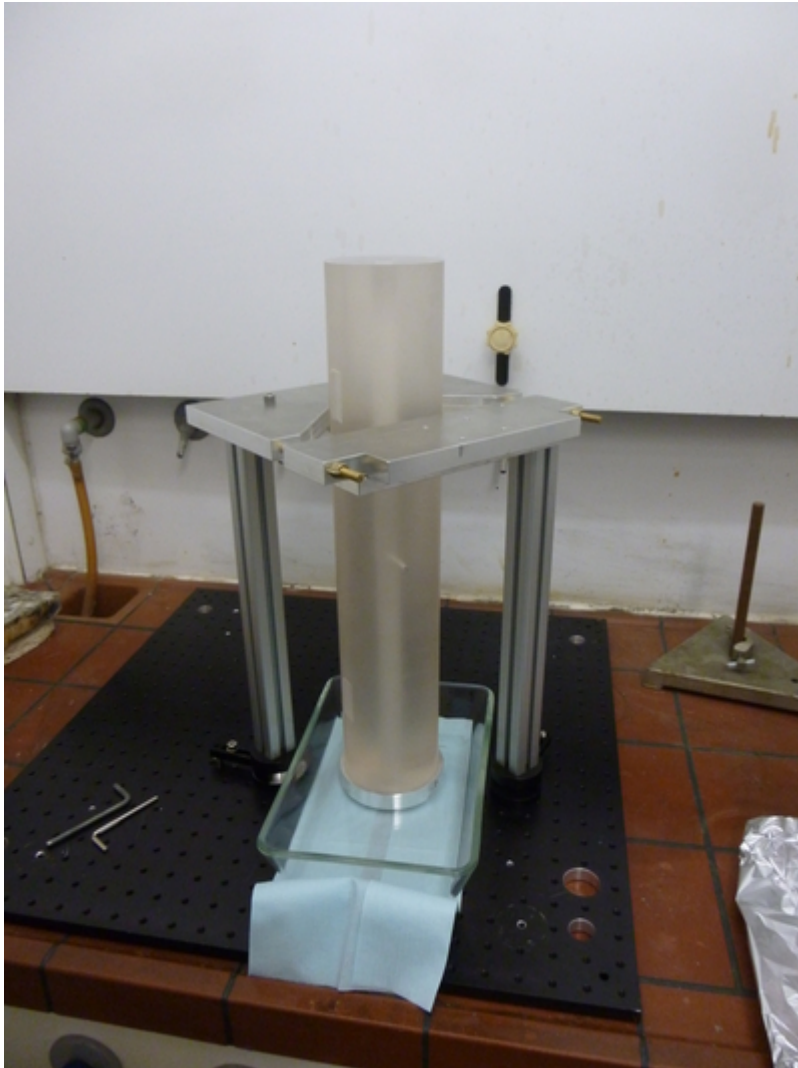


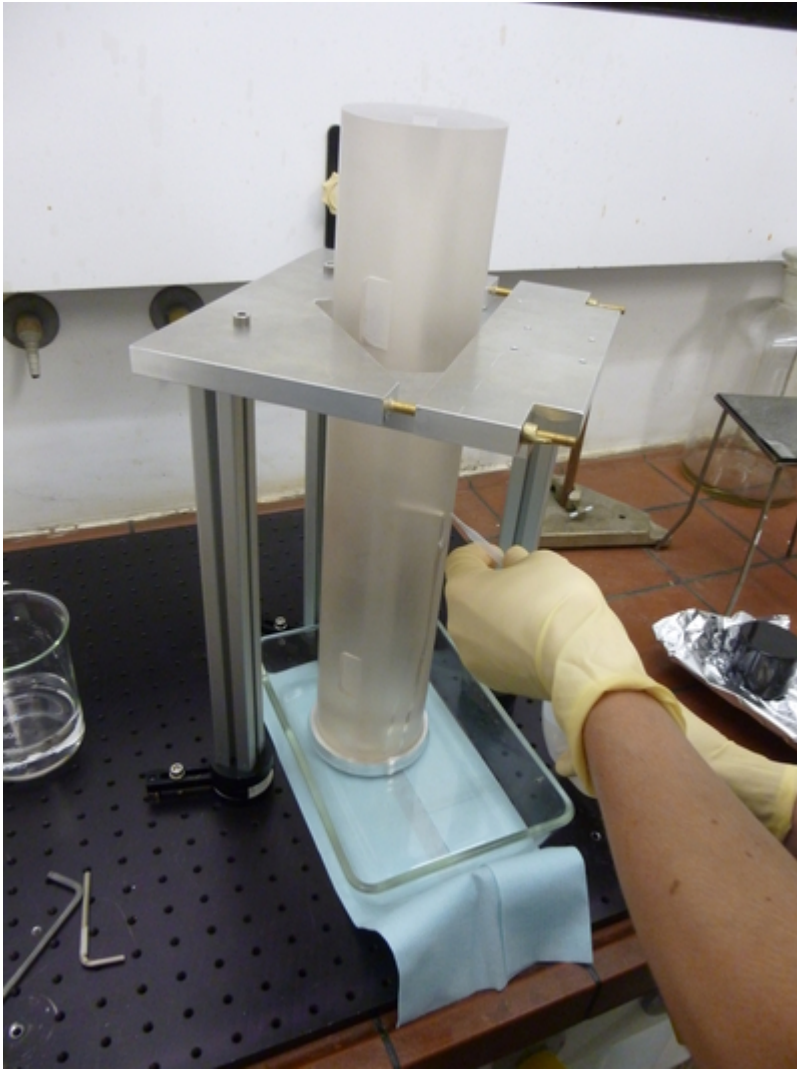


Optisches Kontaktieren


Durchgeföhrt am 27.07.2017

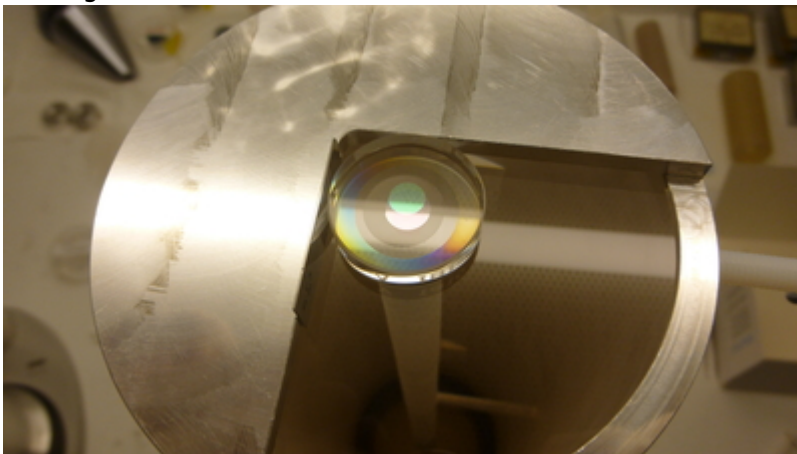

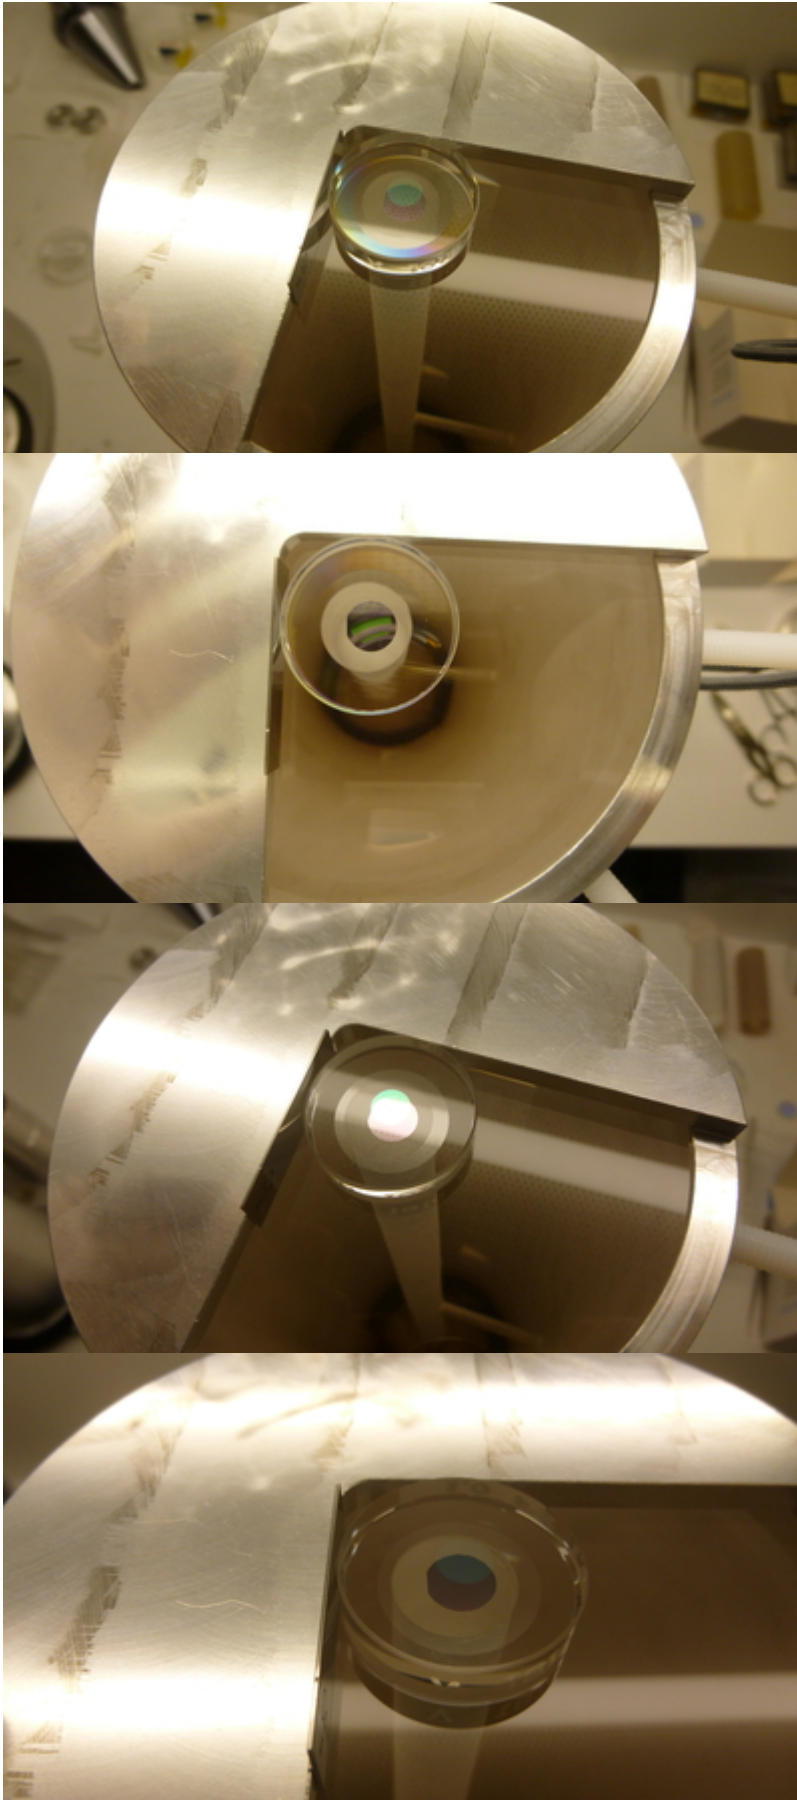




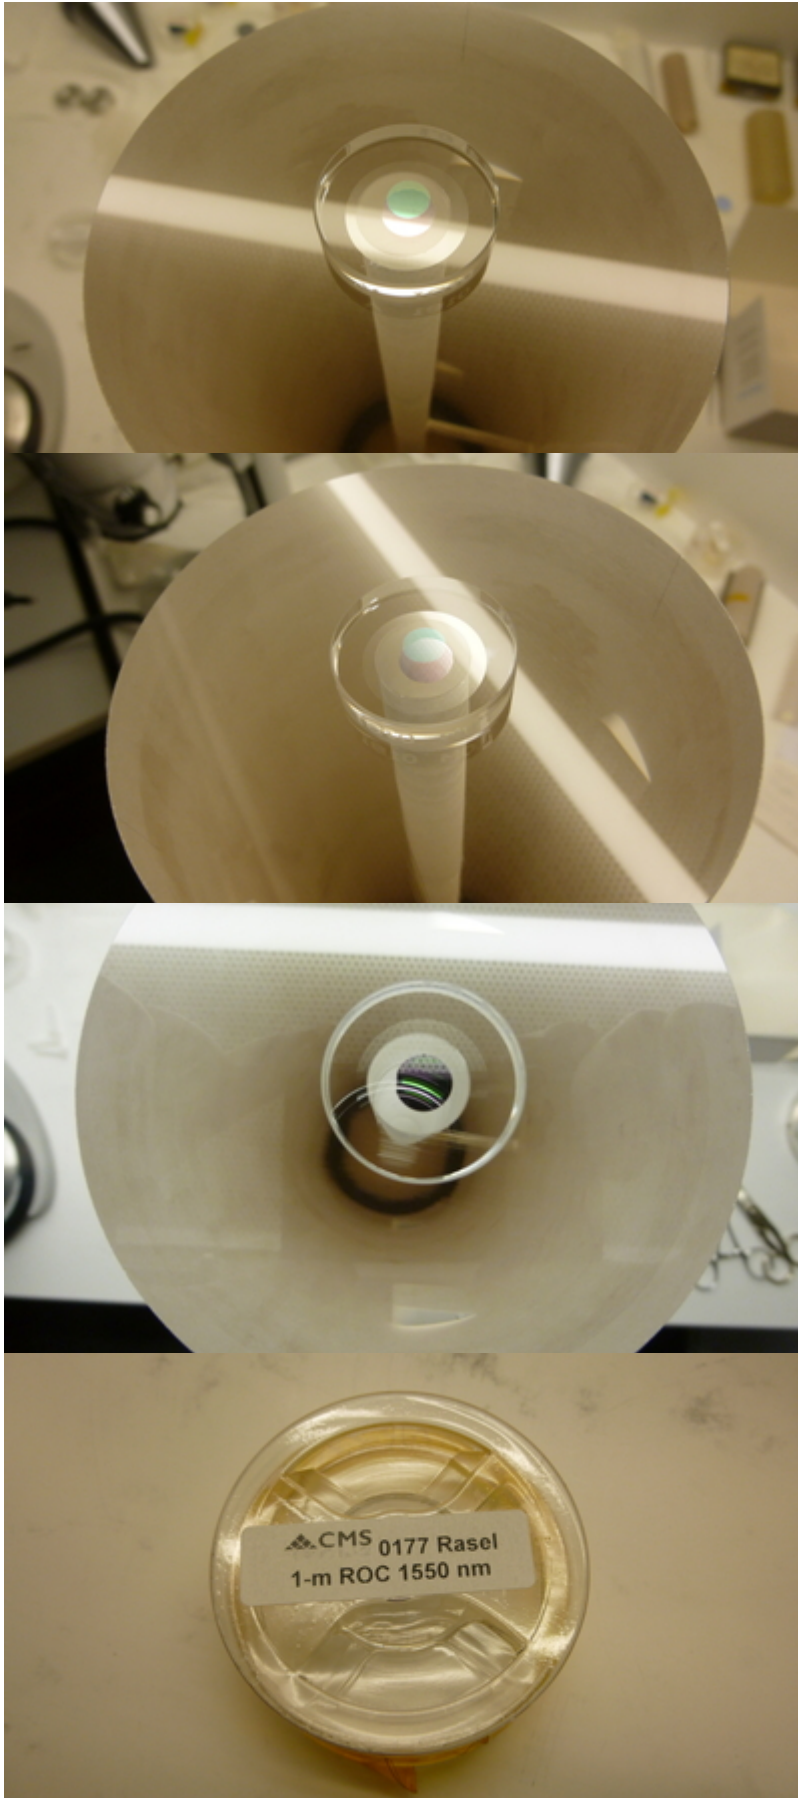


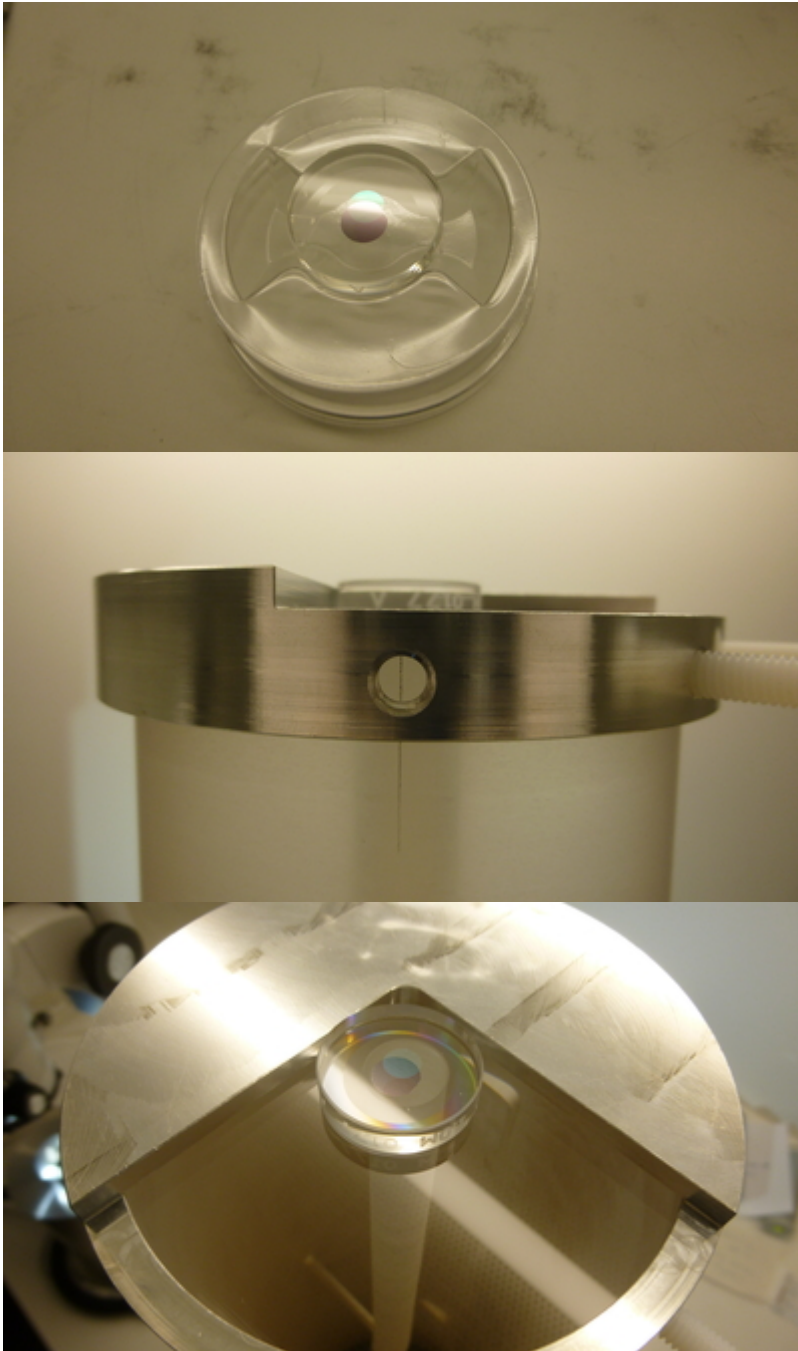




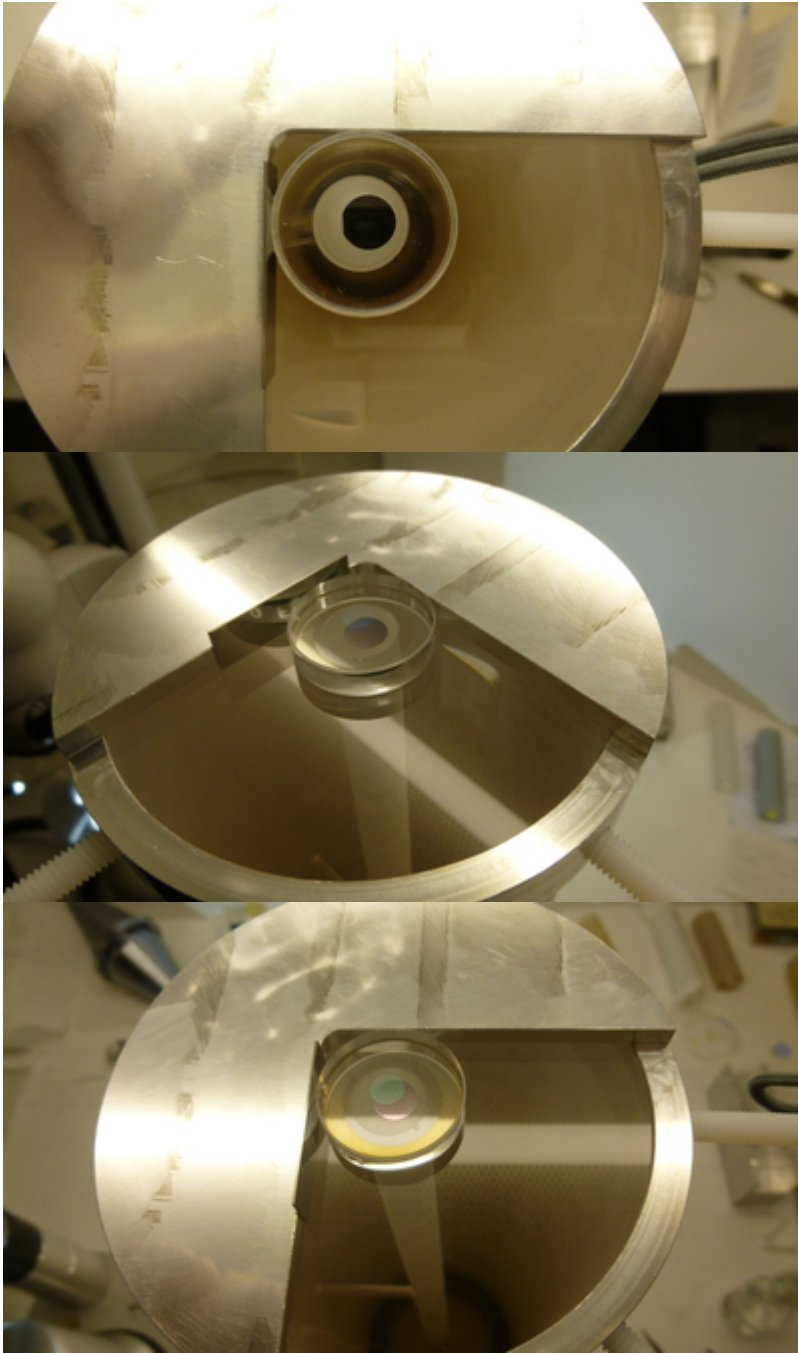





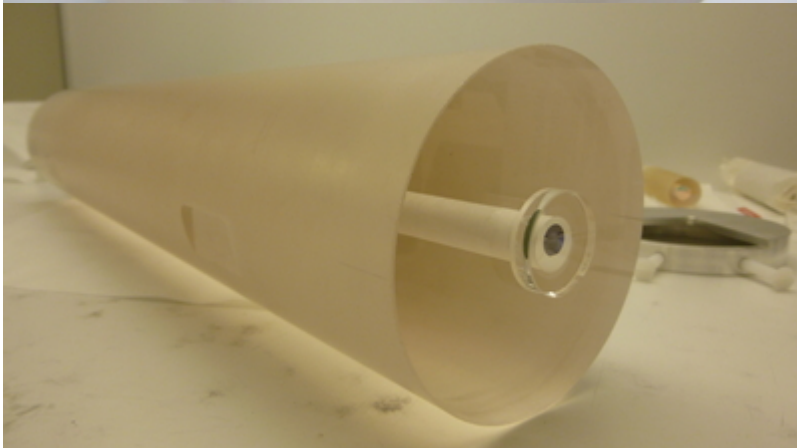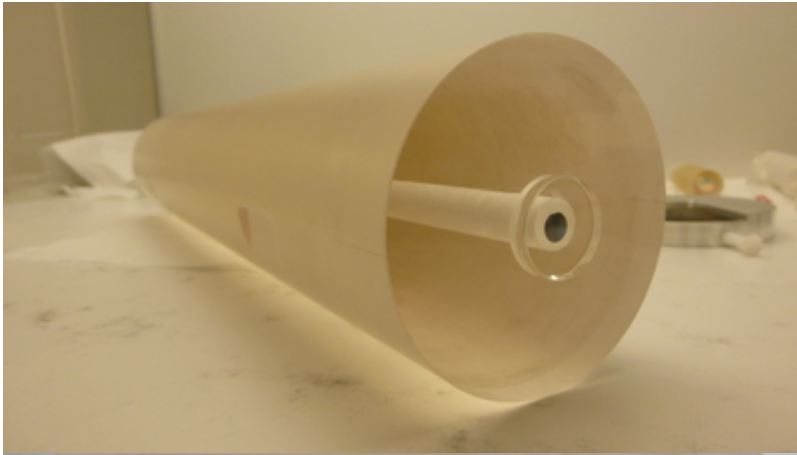

From:
<https://iqwiki.iqo.uni-hannover.de/> - IQwiki

Permanent link:
https://iqwiki.iqo.uni-hannover.de/doku.php?id=groups:mg:project_ptb-cavity:optical_contacting&rev=1503319498

Last update: **2017/08/21 12:44**

