

# 383 nm Laser system (T-MOT)

The 383 nm laser system consists of 767 nm lasers which are then frequency doubled to achieve 383 nm light.

## External Cavity Diode Laser (ECDL)

For 767 nm lasers, ECDL in Littrow configuration is used. Typically we used the laser diodes from Eagleyard Photonics: EYP-RWE-0790-02000-1500-SOT02-0000

Recently, Eagleyard has replaced these with new laser diodes: EYP-RWE-0760-02010-1500-SOT12-0000

## TA

- Output Power: 1.5 W
- Input Current: 2 A
- Injection Power: 32 mW
- Power behind 30dB Isolator: 1.05 W

## Fiber

- PMC-780-5,0-NA012-3-APC-200-P
- Incoupling: 67%
- Power behind fiber: 700 mW

# Frequenzy doubling

## LBO-Crystal


- Length: 15 mm
- AR coating

## Resonator

- Ring resonator (double Z configuration)
- Length: 280mm
- Curvature of mirrors: 50 mm (S3 and S4)
- Distance of mirrors: 64 mm
- Waist: 30μm (crystal), 130μm (long arm)
- Transmission: TS3 = 0.049%, T1 = 1.2 %
- Conversion efficiency ENL =  $6.1 \cdot 10^{-5} / W$


$$E_{NL} = \kappa L_c k_1 h_m(B, \xi)$$

- Linear losses:  $eL = 0.85(0.15) \%$
- Finesse:  $F = 270$

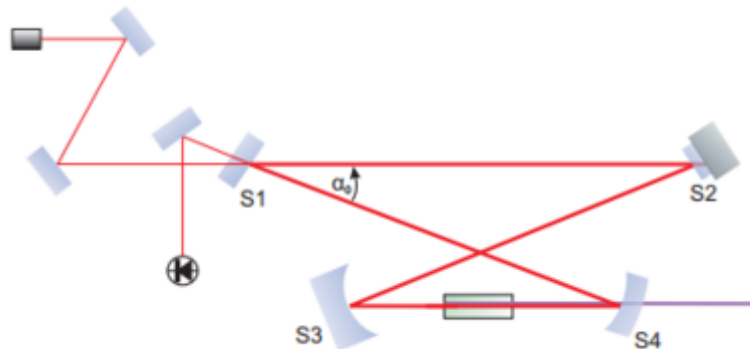

## Stabilisation

- PDH-Method
- Error signal at about 20 MHz

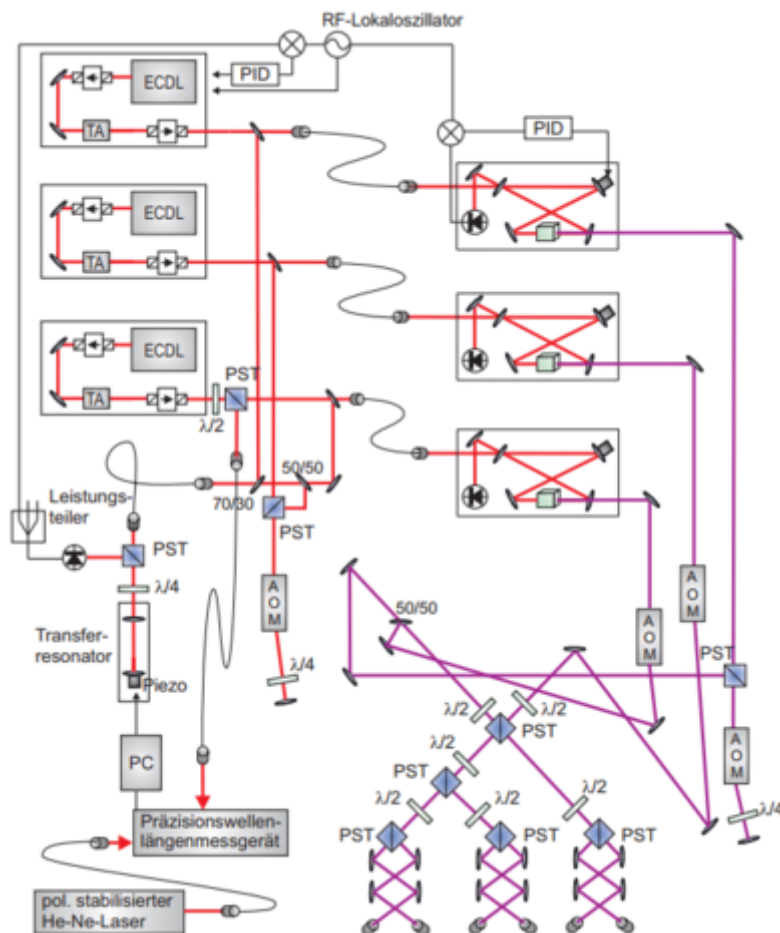

From:

<https://iqwiki.iqo.uni-hannover.de/> - IQwiki

Permanent link:

<https://iqwiki.iqo.uni-hannover.de/doku.php?id=groups:mg:experiment:laser:383nmlaser&rev=1528373482>

Last update: **2018/06/07 12:11**

